



The SX-70VG

The SX-70VG has an undercarriage variable gauge to facilitate transport and provide improved stability. The seat rotates along with all the controls thus improving comfort and visibility for the operator.

The machine is equipped with ROPS protection, in which a closed cab with wide visibility, heating, and air conditioning can be mounted. The anti-tipping system processes the position of the counterweight, adjusting the relative lifting capacity, showed on a 12" display.



LIFT CAPACITY
70-ton



WEIGHT
101,412 lb




HORSEPOWER
302 HP

Specifications

Engine	CAT C7.1 -da 302HP@2200rpm EU Stage V / Tier 3 / Tier 4 Final
Hydrostatic transmission	Danfoss
Working weight	101,412 lb (46,000 kg)
Speed	3.7 mph (6 km/h)
Operator protection	Roll-bar ROPS-FOPS
Maximum load capacity	70 ton
Winches maximum speed	262 ft/min (80 m/min)
Ropes	19 mm diameter
Standard arm	23 ft (7 m)
Track shoes width	28 in (71 cm)
Track length	14.5 in (37 cm)
Maximum capacity	13 US gal/min (50 L/min)
Gradient tolerances (longitudinal)	30°
Gradient tolerances (cross slope)	15°

Lifting Chart

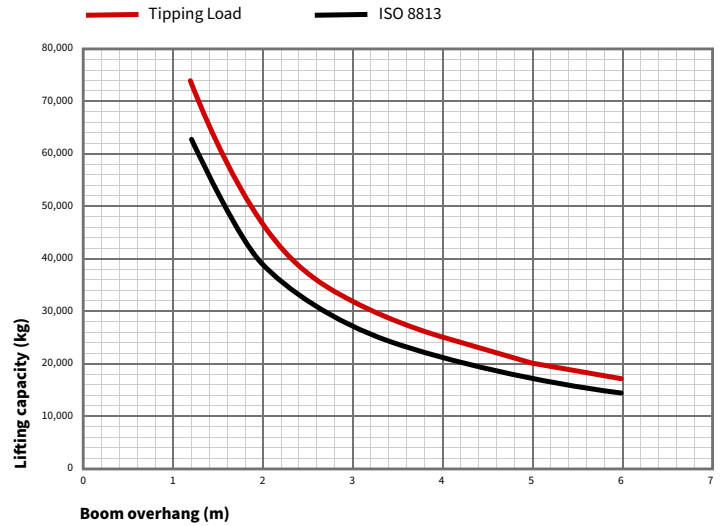

Dimensions

